

**2U Rackmount Server
Chassis with 6 HDD Trays with
Hot Swap SCSI/SATA Backplane,
Quadruple 8cm Fan, Supports 12"x 13"
Dual Xeon Motherboard.**


Supports 10" x 12" Dual Xeon Motherboard

400W/480W/550W EPS PSU

(4) Fans for Excellent Cooling

(6) Front Access 3.5" HDD trays with Hot
Swap SCSI/ SATA backplane

Slim CD-ROM and Standard 3.5" FDD

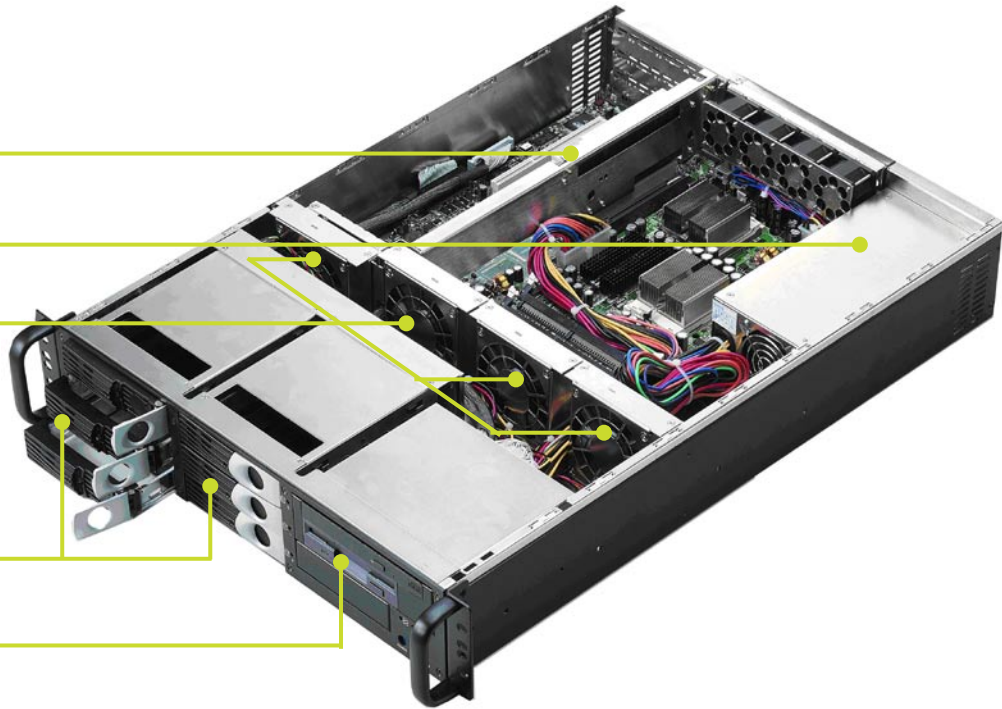


Introduction

The SRV-2618M 2U Rackmount Server Chassis provides serious server integrator with a mean to build a very comprehensive server. It is designed to support Dual Xeon motherboard up to the size of 12" x 13", expandable with 3 PCI-slot riser card. With SCSI/Serial-ATA backplane, the SRV-2618M supports hot-swap function of six 3.5" HDD accessible from front panel. The combination between four 8 cm fans positioned in the middle of the chassis, fan monitor board and systematically wide-spread ventilation around the chassis provides SRV-2618M with flawless cooling system. Optional extra quadruple fans can be added for more heat sensitive applications. Depends on the size of the application, SRV-2618M gives the selection of /400W/480W/550W EPS power supply.

Features

- Standard 2U 19" Rackmount Server Chassis supports 12"x13" Dual Xeon motherboard
- Six Front access HDD trays with SCSI/Serial-ATA Hot Swap backplane
- Fan monitor board with alarm
- Slim CD-ROM and Standard 3.5" FDD included plus extra space for 3.5" drive
- Quadruple 8cm fan for excellent cooling
- 400W/480W/550W 2U EPS power supply

Technical Drawing

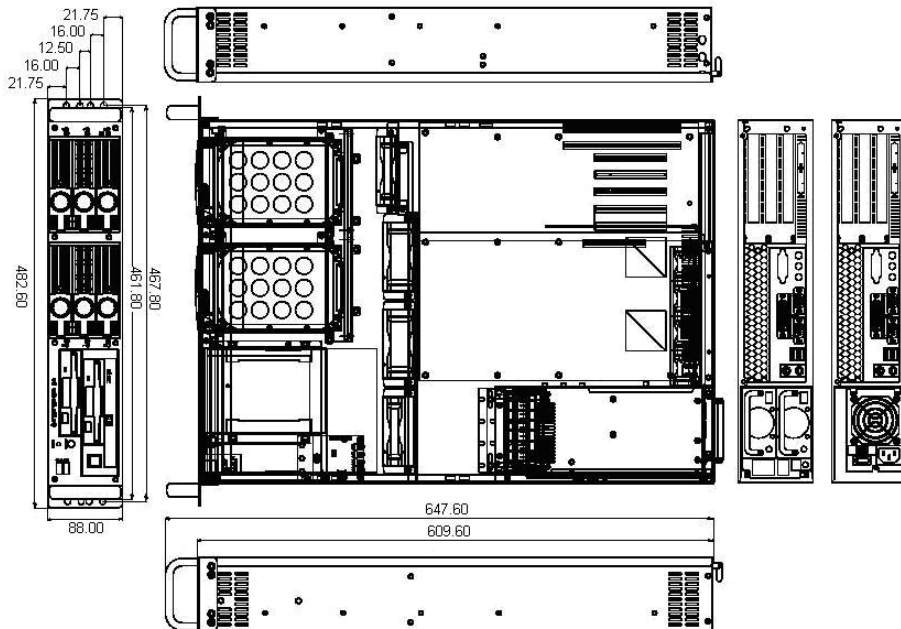

Construction

Heavy-Duty Steel with Ni Plating

Color

Black

Board Support

Dual Xeon Motherboard up to 12" x 13" .

Hot Swap Function

(6) Front access HDD trays with SCSI / Serial ATA hot-swap back-plane

Drives

(1) Slim CD-ROM drive and (1) Slim 3.5" FDD drive included, and space for 3.5" Internal Drive.

Expansion

(3) PCI 64 bit riser card (32 bit optional).

Cooling System

Dual 9cm blower with heat pipe and fan monitor board.

Power Supply

400W/480W/550W EPS power supply.

Switches and Connectors

On/Off switch, reset switch, and (2) USB 2.0 ports.

Indicators

Power on/off, HDD1~HDD6, LAN, Fan and Temperature and Fan status.

Dimensions

430(W) x 88(H) x 609.6(D) mm /19" x 3.46 x 24"

Operating Temperatures

0~55 °C

Gross Weight

17 kg

Ordering Information

SRV-2618M-S-550E	1U Server with (6) SCSI hot-swappable drive bays and 550 watt EPS power supply
SRV-2618M-S-400E	1U Server with (6) SCSI hot-swappable drive bays and 400 watt EPS power supply
SRV-2618M-S-480E	1U Server with (6) SCSI hot-swappable drive bays and 480 watt EPS power supply
SRV-2618M-A-550E	1U Server with (6) SATA hot-swappable drive bays and 550 watt EPS power supply
SRV-2618M-A-400E	1U Server with (6) SATA hot-swappable drive bays and 400 watt EPS power supply
SRV-2618M-A-480E	1U Server with (6) SATA hot-swappable drive bays and 480 watt EPS power supply